

# 10 in 1 Interl Certified Thunderbolt 3 Titan Ridge Tahini Docking Station

## Fullink Model No.: 0936




### Specification:

1. **Input** Thunderbolt 3 Female with 40Gbps bandwidth
2. **Output**
  - 1xThunderbolt Female: 8K/60Hz(with DSC) or 8K/30Hz (without DSC)
  - 1xDP1.4 Female: 8K/60Hz(with DSC) or 8K/30Hz (without DSC)
  - 2xUSB-A 3.2 Gen2 : 10Gbps, support 5V/1.5A power charge, one port nearby the USB-A 3.2 Gen 1 support BC1.2
  - 1xUSB-C 3.2 Gen2 : 10Gbps, support 5V/1.5A power chargeand BC1.2
  - 1xUSB-A 3.1 Gen1: 5Gbps
  - 1xRJ45: 10/100/1000Mbps
  - 1xSD4.0 and 1xMicro SD4.0
  - 1x3.5mm Audio/Mic
  - 1xDC Power:130W
3. This dock is compatible with both Thunderbolt 3 and Non-Thunderbolt 3 full-function DP ALT MODE USB-C computers, and is also fully compatible with both MacBooks running Mac OS, and laptops running Windows.
4. 10 in 1 Docking Station comes with all the necessary functions you need in daily life and general work, and aslo optimize your work zone at home or your office.
5. Brilliant performance with Dual Display up to 3840x2160P/60Hz, support both mirror and extend mode.
6. 130W power supply from the matched DC Power Adapter, it can be able to provide up to 60W of power for a connected laptop which keeps your laptop charged while in use, without the need for a separate power cable.
7. Others including:
  - Switch Button with indicator light
  - Kensington Lock
  - 1pc seperated Thunderbolt 3 Cable

### Note:

- 1.If you connect Non-Thunderbolt 3 full-function DP ALT MODE USB-C computers,there will be no video output from the Thunderbotlt 3 output interface.
- 2.DC Power Adapter must be standard. If the connected USB devices exceed the power limited, it will carry out power off protection.
- 3.When the dock is connected to DC Power Adapter, it will start up by default. Then press the button and the light will be off. Press the button again, the light will turn on and the dock is connected to power supply.

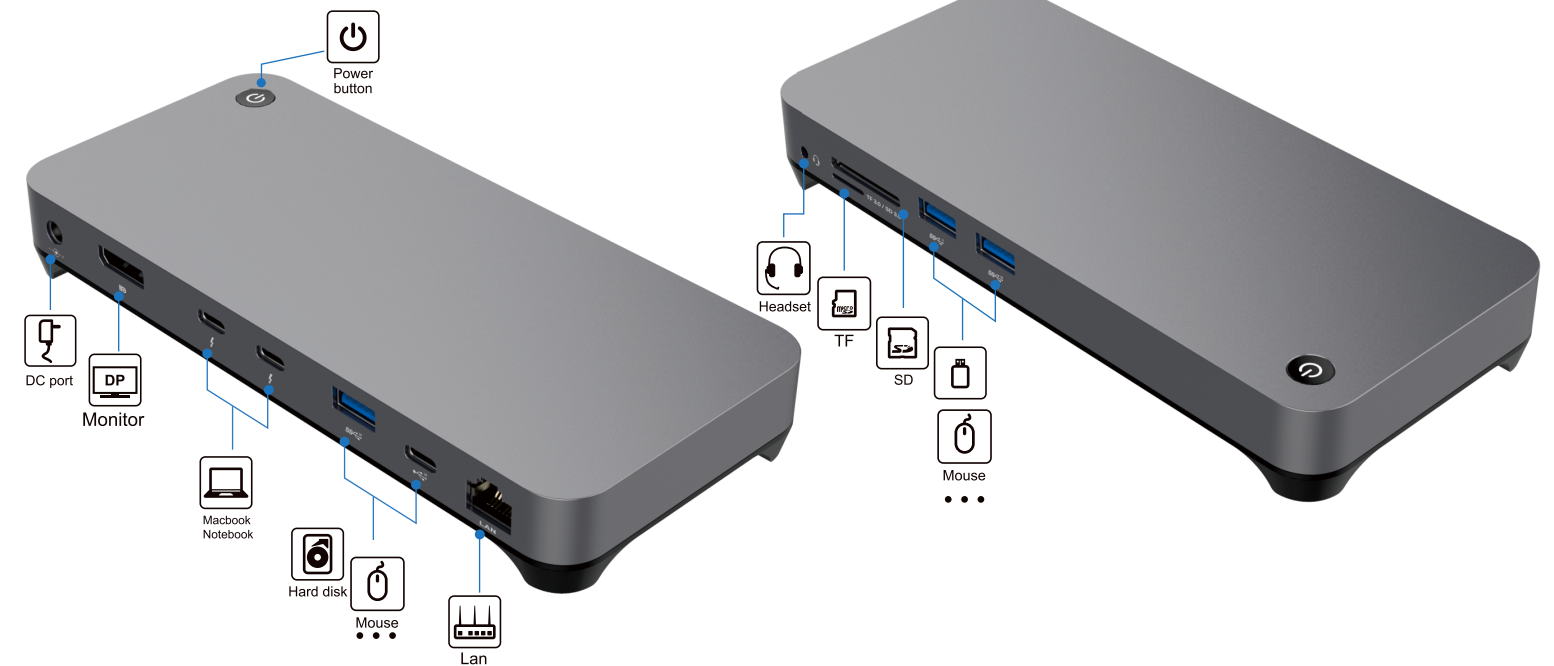

Fullink Technology Co., Ltd  
Website: <https://www.fullink.com>