

ABS Case DisplayLink Docking Station
Fullink Model No.: 1001

Specification:

1. **Input** : USB-C/F (Connect PC/Laptop equipped with USB-C or USB-A)
2. **Output** :

Video Port	Windows (MST Mode)	
	Single Display	Dual or Triple Display
HDMI1	3840*2160/60Hz	3840*2160/60Hz
DP1	3840*2160/60Hz	3840*2160/60Hz
HDMI2	3840*2160/60Hz	3840*2160/60Hz
DP2	3840*2160/60Hz	3840*2160/60Hz
HDMI3	3840*2160/30Hz	3840*2160/30Hz


USB Port	Speed	Version	BC1.2
A1	10Gbps(1280MB/s)	3.1/3.0/2.0	√
C1	10Gbps(1280MB/s)	3.1/3.0/2.0	√
A2	5Gbps(640MB/s)	3.0/2.0	N/A
A3	5Gbps(640MB/s)	3.0/2.0	N/A
C2	5Gbps(640MB/s)	3.0/2.0	N/A

1xRJ45:support Ethernet Gigabit speed up to 10/100/1000Mbps
1x3.5mm Audio:support Audio out and Mic in
1xDC 100W(24V/4A): can be used for charging for both dock and PC

3. Other Accessories:
switch button and Kensington Lock
USB-C & USB-A to USB-C 2 in 1 Cable 0.5m
100W DC power adapter
4. 5 video ports (2XDP+2XHDMI +HDMI) can be matched freely, support max 3 external monitors display at the same time with different images (MST).Any two or three ports are displayed at the same time, MST display mode is supported.
5. The same group (DP1+HDMI1 or DP2+HDMI2) only support single display, if DP and HDMI are connected to the monitors at the same time,DP will be displayed preferentially.
6. The Docking Station integrates all functions in one, can meet all the demand of users, it's really an universal dock for office/commercial/home use.

Notes:

- 1) Two video ports from the same Group cannot output simultaneously
- 2) The host with Intel Graphics Card can support max 3 screens display at the same time (including the own of computer's screen). If you want external three screens displayed simultaneously, you need to turn off the the own of computer's screen.
- 3) Mac OS just support SST rather than MST
- 4) It's necessary for the computer (Windows or Mac OS) to be installed DisplayLink drivers to display properly, the url of driver download should be <https://www.displaylink.com>.

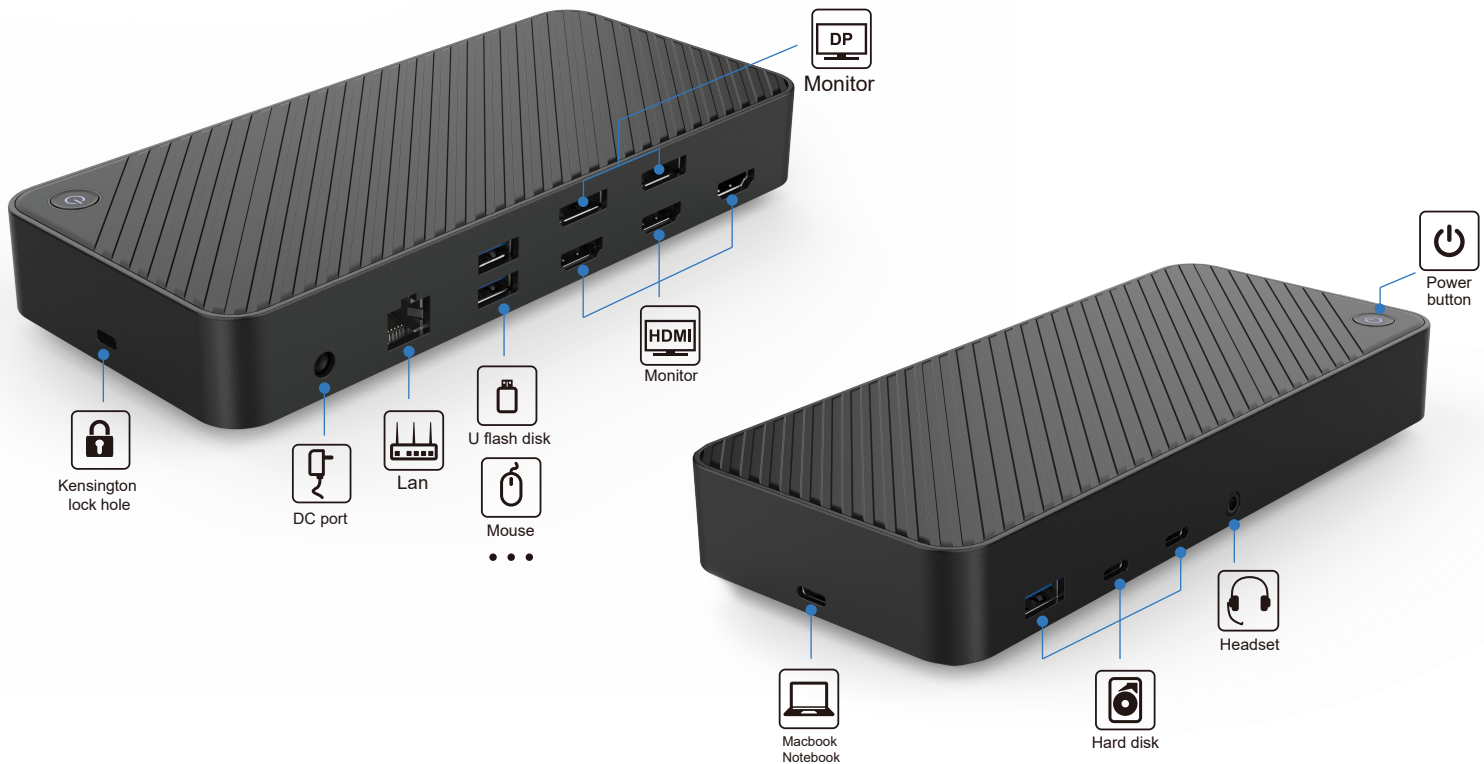

Fullink Technology Co., Ltd
Website: <https://www.fullink.com>